



UNA-Edge™ Metal Edge System



UNA-Edge™ GS
Gravelstop System

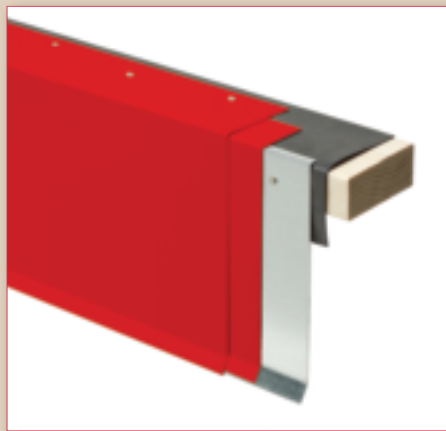

UNA-Edge™ DE
Drip Edge System

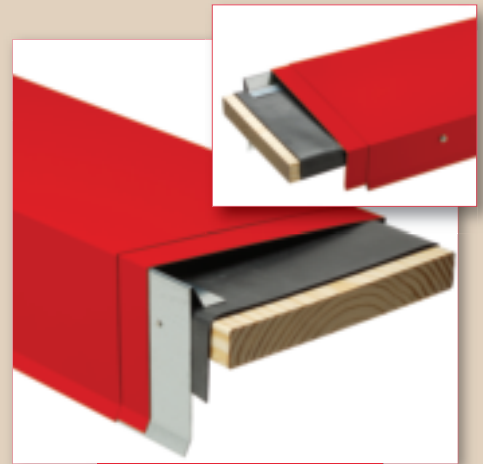

UNA-Edge™ CO
Coping System

Features

- ANSI/SPRI ES-1 Code Compliant
- Three systems available: Gravelstop; Drip Edge; and Coping
- Shipped as a full system: cleats, splices and fasteners included
- Available in aluminum or galvanized (G-90) steel
- Available in over 30 standard colors
- Simple and straightforward architectural sheet metal detailing, with no spring clips or extruded components
- FM 4435 tested
- Eligible for inclusion in Red Shield warranty roof with coverage of up to 20 years
- Prefabricated miter corners available

Benefits

- Delivers the assurance and security inherent in a Firestone-tested edge metal system
- Assured code compliance for your edge metal systems
- Simple design helps save installation time and labor costs
- Single-source supplier for all necessary components, from systems to fasteners to warranty

Firestone
BUILDING PRODUCTS

NOBODY COVERS YOU BETTER™

Firestone Quality

The Firestone name is synonymous with quality, innovation and leadership. Through annual investments in research and development, we remain at the forefront of advances in roofing technology.

Firestone UNA-Edge™



The straightforward design of each Firestone UNA-Edge™ system (with no cumbersome spring clips or extruded components) adds up to simple installation, saving both time and money.

Firestone UNA-Edge™ Metal Edge System Product Information

- Consists of three edge securement systems: UNA-Edge™ GS (Gravelstop); UNA-Edge™ DE (Drip Edge); and UNA-Edge™ CO (Coping)
- UNA-Edge™ systems are factory-fabricated in 10' lengths and all components are shipped together

UNA-Edge™ System

Components:

- Cover: 24ga or 22ga galvanized steel with KYNAR® paint finish or .040" or .050" aluminum with mill finish, coil-anodized finish or KYNAR® paint finish (see Color Selection Guide)
- Cleat: 20ga galvanized steel self-indexing full length cleat
- Splices: 6" wide concealed splices, provided at a rate of one per 10' section, with one extra splice per every 100 linear feet (or fraction thereof)
- Fasteners: Type 304 stainless steel 5D annular ring 1¾" nails (for all systems); Screws – ¼" hex head 9 x 1½" T-17 stainless steel screws with sealing washer (for Coping systems only)

Optional Components:

- 90 degree inside coping corners
- 90 degree outside coping corners
- Custom coping miters

Firestone
BUILDING PRODUCTS

NOBODY COVERS YOU BETTER™

Firestone Building Products

310 East 96th St., Indianapolis, IN 46240

Corporate Office: 1-800-428-4442 • 317-575-7000 • Fax: 317-575-7100

www.firestonebpco.com